



DUTILE MTA

GENERAL PURPOSE CEMENTITIOUS WATER RESISTANT TILE ADHESIVE

DUTILE MTA is a polymer modified cement based water resistant general purpose tile adhesive for thin or thick bed fixing of ceramic and earthenware tiles on floor for indoor purposes.

It is normal setting cementitious (C1), anti-slip (T), and extended open time (E) tile adhesive made of Portland cement, graded sand, synthetic high quality resin and specialty additives.

APPROPRIATION

Type of tiles: Ceramic and earthenware Size of tiles: 30cm x 30cm and below
Indoor, outdoor or both: indoor only Floor, wall or both: Floor only .

APPLICATION AREAS

Interior bonding up to 15mm thick on floors of ceramic and earthenware tiles of size 30cm*30cm and below (single and double fired tiles, clinker, terracotta, etc) on uneven substrates and renders, basement to 3rd floor elevation.

ADVANTAGES

- Thin or thick bed fixing
- Excellent adhesion to even on non-porous substrates
- Water resistant
- Used for indoor purposes
- Excellent bonding even in damp conditions
- Excellent resistance to water and humidity
- Slump resistance
- easy and economical to use
- Excellent workability
- Low VOC emission
- Extended open time
- Anti-slip

APPLICATION

Coverage

Solid bed fixing: 3mm-6mm depth 5.5-11 kg/m² , Notch trowel: smooth surface 2kg/m²

Instructions for use


Mix DUTILE MTA adhesive in a ratio of 6 to 7 liters of water per 25kgs bag and 4.5 to 5.5 for 20kgs Bag. Mix to a uniform lump-free consistency. Leave for approximately 5 minutes to allow the resins to completely dissolve. Moisten the support if necessary, but never the tiles. Mixing should be by a force action mixer. Hand mixing is recommended for small quantities only.

Point to be noted:

taken in preparing the mortar. Prepare only the surface, which can be tiled within this time. DUTILE MTA should not be used on painted or metal surface and on wooden surface.

Method of Application

Apply DUTILE MTA adhesive to a uniform thickness of 3mm to 6mm on the support to cover the slots on the back of the tiles, of an area of not more than 1m at a time.
for horizontal applications a solid bed fixing is recommended .Use a toothed spatula to comb horizontally to remove excess. The trowel should have 6mm notches at 25mm intervals center to center.
apply the tiles, press it, and smooth out carefully so that the mortar is spread evenly. If the bonding is perfect, the tile will not slide. The joints can be filled with Dugrout (available with grey and white or any requested color)

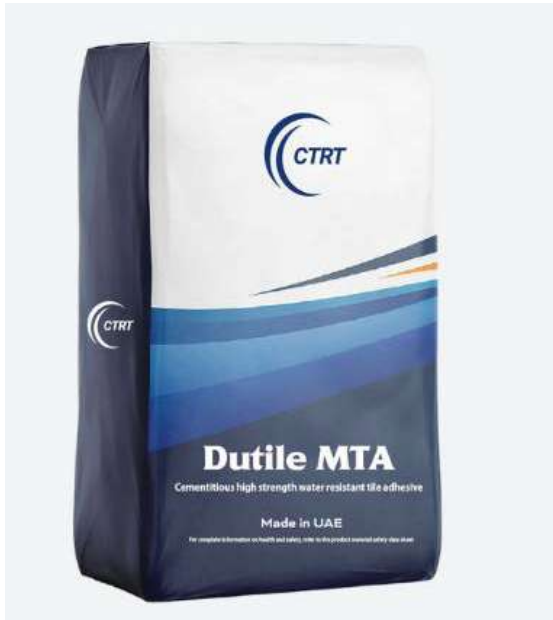

DUTILE MTA

CONSUMPTION

Approximately 2kg/m² depending on the support. Clean the tools with water after use. Store in dry conditions and protect against wind and rain.

PACKAGING AND STORAGE

Shelf life: DUTILE MTA can be kept for 12 months in unopened packs.
Packaging: 15, 20 & 25 KG Bags

HEALTH & SAFETY

DUTILE MTA is formulated without any hazardous substances. However, as with all construction chemical products, it is important to exercise caution. When handling DUTILE MTA, it is recommended to wear protective clothing such as gloves and goggles. For maximum safety, wearing a long sleeve overall, safety shoes, and a face mask is also advised. After each use, reseal the containers and store the product according to the safety instructions on the label. In case of contact with the skin or eyes, immediately rinse with fresh water. If any of the product is accidentally swallowed, do not induce vomiting, but seek immediate medical assistance. For more detailed information, please consult the Material Safety Data Sheet (MSDS) provided.

TECHNICAL SPECIFICATIONS

Classification	C1TE
Aspect	Powder
Color	Grey, White
Density	1.6gm / c.c. app
Flash point	Not applicable
Std. conforms to	BS 5204, EN 12007-1, ANSI A 118.1
Tensile strength	Part 7: 1985: 2.5N/mm ² :(BS 6319)
Flexural strength	4.0N/mm ² :(BS 6319: Part 3: 1990)
Initial Adhesion strength(28 days)	m ²
Adhesion after heating	0.9N/mm ²
Adhesion after water immersion	0.7N/mm ²
Adhesion after freeze Thaw cycles	0.8N/mm ²
Pot life (hrs)	6
Adjustment time (min)	App. 45
Open time (min)	>20
Grouting time on wall(hrs)	8
Grouting time on floor(hrs)	24
Application temperature	5C 40C
VOC Content in g/L	<1

CTRT By Duproof:



ISO 9001:2015

9940

P.O Box 74334, Dubai, United Arab Emirates | T:+97148851212 | info@ctrtrglobal.com | www.ctrtrglobal.com

The information given in this data sheet is based on both current development work and many years of field experience. Whilst every effort is made to ensure that the information is reliable, we cannot accept responsibility for any work carried out with our materials as we have no control over methods of application, site, conditions, etc.