



DESCRIPTION

DUFLASH aluminum flashing strips are designed and engineered to ensure water tightness in critical roofing applications made from high quality aluminum.

MAIN USES

DUFLASH is used as vertical flashing in the termination of the membranes at the parapet in the roofing applications.

TYPES


DUFLASH is available in thickness from 0.9mm to 1.5mm in the various profiles as required.

ISS: 1/4/17, REV: 0

DUFLASH

Aluminum Flashing Strips

CTRTR by Duproof

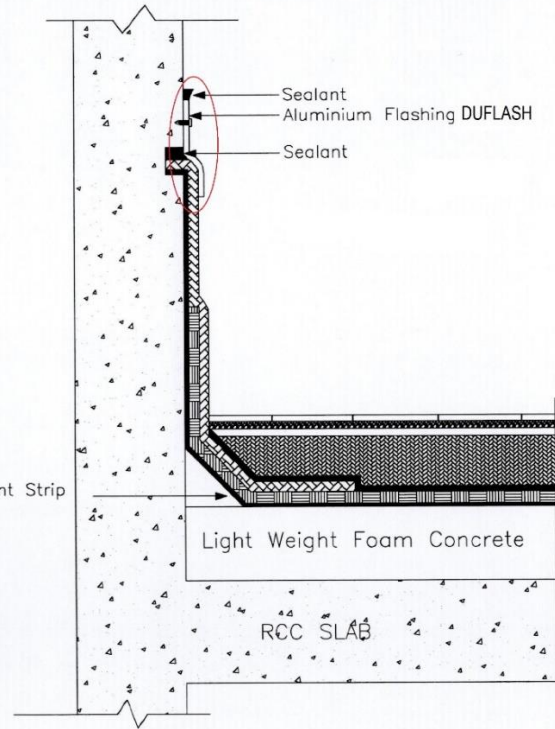

TECHNICAL DATA

Chemical Data

As per ASTM B 209m-10

PROPERTY	Value
Si + Fe Content	0.95 max.
Mn Content	0.05 max.
Mg Content	NIL
Cu Content	0.20 max.
Zn Content	0.10 max.

Physical Data

PROPERTY	Value
Gauge (mm)	0.9 to 1.0
Profile	As required

These data are correct at the time of printing but may be changed without any prior notice subject to client's requirements, availability to raw materials or other conditions. These data sheets supersede all previous publications pertaining to this product. All reasonable care has been taken in preparing this document, which to the best of our knowledge is accurate and true. Recommendations and suggestions are made in good faith and should only be considered for general guidance. No liability is assumed or taken by us in relation to the application, as usage conditions and any labor involved are beyond our control.